

Table of Contents

สารบัญ

Page/หน้า



ตู้กันฝุ่น DA (IP40)
Compact Enclosures DA

04



ตู้กันน้ำ DS, DSS, DSG (IP45)
Compact Enclosures DS, DSS, DSG

05



ตู้กันฝุ่นสแตนเลส DA-S (IP40)
Compact Enclosures DA-S Stainless

08



ตู้กันน้ำสแตนเลส DS-S, DSS-S, DSG-S (IP45)
Compact Enclosures DS-S, DSS-S, DSG-S Stainless

09



ตู้เชื่อมรอบกันน้ำ DX (IP65)
Compact Enclosures DX

12



ตู้เจียง DC
Desk Console Enclosures DC

13



ตู้คอมพิวเตอร์ DP
Computer Panel DP

14



ตู้เมนควบคุมระบบไฟฟ้าภายในอาคาร DM
Main Distribution Board Indoor Type DM

15



ตู้เมนควบคุมระบบไฟฟ้าภายนอกอาคาร DO
Main Distribution Board Outdoor Type DO

19



ชั้นวางของ D-CASE และ Pull Boxes DB
Shelf D-CASE & Pull Boxes DB

21



รางสายเวย์ DW
Wire Way - DW

22



รางเคเบิลแลดเดอร์ DQR
Cable Ladder - DQR

24



รางเคเบิลเทรย์ DSR
Cable Tray - DSR

28



อุปกรณ์เสริม
Accessories for Switchboard

32



พัดลมระบายความร้อนในตู้คอนโทรล
Fan Ventilation DF

35

Compact Enclosures Model DA



Features

Designed to prevent dust from getting inside the enclosure and equipment.
Suitable for indoor installation.

Major Applications

Dust contaminated environments
Agricultural machines
Others Machine

Protection Category

IP 40

Technical Data


- Rubber seal around gutter
- Included internal mounting plate
- Fixing earth stud included
- Push lock system
- Bottom gland plate for cable incoming



Specification

Material	Body & Plate	Steel sheet 1 mm. (Model DA01-14) Steel sheet 1.5 mm. (Model DA15-20)
	Door	Steel sheet 1.5 mm.
	Key Lock	DENCO 59-Lock-01
Surface Finish		Pre-treatment by zinc phosphate process Powder-coated in texture RAL 7032

DA Model Structure

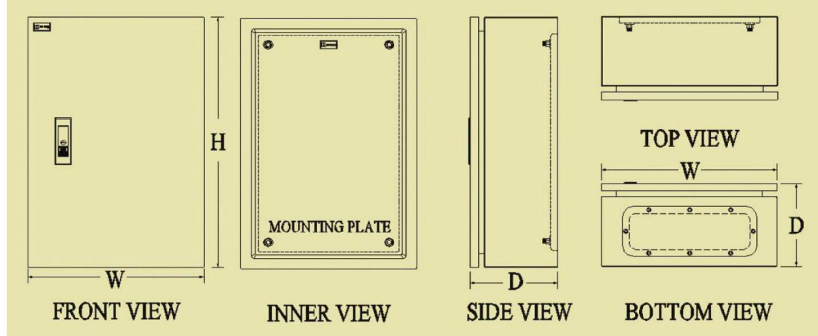

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)	MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DA-01	280	350	150	600	DA-11	500	600	250	1,550
DA-02	300	450	150	830	DA-12	550	700	250	1,750
DA-03	350	450	150	930	DA-13	630	750	250	1,820
DA-04	300	450	200	950	DA-14	630	900	250	2,300
DA-05	350	450	200	1,000	DA-15	600	1100	250	3,300
DA-06	350	500	200	1,100	DA-16	700	1100	250	3,600
DA-07	400	500	200	1,200	DA-17	800	1200	250	4,000
DA-08	450	600	200	1,290	DA-18	900	1200	250	4,800
DA-09	450	600	250	1,350	DA-19	800	1200	300	5,200
DA-10	500	600	200	1,450	DA-20	900	1200	300	5,500

Compact Enclosures Model DS



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Controlling waste water treatment system
Outdoor sport stadium

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Single door type

Specification

Material	Enclosure	Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Pre-treatment by zinc phosphate process Powder-coated in texture RAL 7032

DS Model Structure

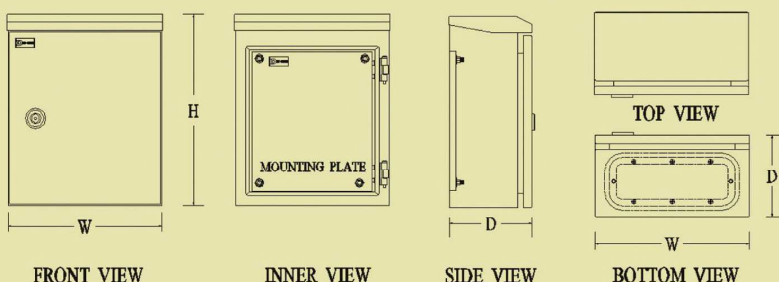

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-01	280	350	150	1,050
DS-02	300	450	150	1,170
DS-03	350	450	150	1,260
DS-04	300	450	200	1,290
DS-05	350	450	200	1,380
DS-06	350	500	200	1,550
DS-07	400	500	200	1,695
DS-08	450	600	200	1,780
DS-09	450	600	250	1,920
DS-10	500	600	200	2,100

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-11	500	600	250	2,250
DS-12	550	700	250	2,400
DS-13	630	750	250	2,750
DS-14	630	900	250	3,200
DS-15	600	1100	250	3,880
DS-16	700	1100	250	4,400
DS-17	800	1200	250	4,850
DS-18	900	1200	250	5,200
DS-19	800	1200	300	5,500
DS-20	900	1200	300	6,000

Compact Enclosures Model DSS



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Controlling waste water treatment system
Outdoor sport stadium

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Double door type

Specification

Material	Enclosure	Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Pre-treatment by zinc phosphate process Powder-coated in texture RAL 7032

DSS Model Structure

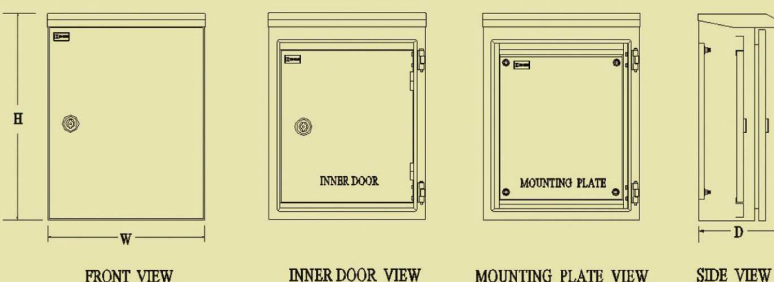

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSS-01	280	350	150	1,265
DSS-02	300	450	150	1,460
DSS-03	350	450	150	1,560
DSS-04	300	450	200	1,585
DSS-05	350	450	200	1,650
DSS-06	350	500	200	1,780
DSS-07	400	500	200	1,950
DSS-08	450	600	200	2,150
DSS-09	450	600	250	2,300
DSS-10	500	600	200	2,420

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSS-11	500	600	250	2,465
DSS-12	550	700	250	2,720
DSS-13	630	750	250	3,600
DSS-14	630	900	250	3,870
DSS-15	600	1100	250	4,250
DSS-16	700	1100	250	4,950
DSS-17	800	1200	250	5,100
DSS-18	900	1200	250	5,600
DSS-19	800	1200	300	6,000
DSS-20	900	1200	300	6,500

Compact Enclosures Model DSG



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Controlling waste water treatment system
Controlling Spring System

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Double door type, Viewing window

Specification

Material	Enclosure	Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Pre-treatment by zinc phosphate process Powder-coated in texture RAL 7032

DSG Model Structure

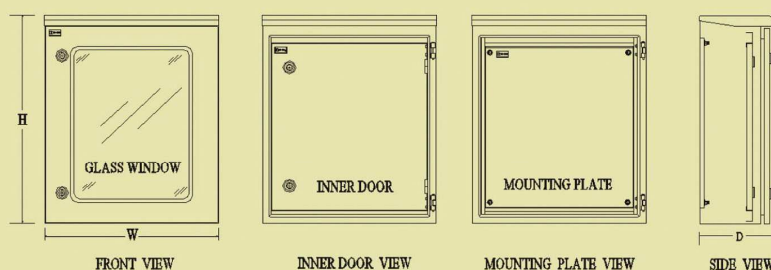

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSG-01	280	350	150	1,550
DSG-02	300	450	150	1,770
DSG-03	350	450	150	1,890
DSG-04	300	450	200	1,920
DSG-05	350	450	200	1,980
DSG-06	350	500	200	2,100
DSG-07	400	500	200	2,280
DSG-08	450	600	200	2,400
DSG-09	450	600	250	2,650
DSG-10	500	600	200	2,850

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSG-11	500	600	250	2,970
DSG-12	550	700	250	3,200
DSG-13	630	750	250	4,000
DSG-14	630	900	250	4,550
DSG-15	600	1100	250	5,100
DSG-16	700	1100	250	5,500
DSG-17	800	1200	250	5,800
DSG-18	900	1200	250	6,300
DSG-19	800	1200	300	6,800
DSG-20	900	1200	300	7,200

Compact Enclosures Model DA-S



Features

Designed to prevent dust from getting inside the enclosure and equipment.
Suitable for indoor installation.

Major Applications

Dust contaminated environments
Agricultural machines
Others Machine

Protection Category

IP 40


Technical Data

- Rubber seal around gutter
- Included internal mounting plate
- Fixing earth stud included
- Push lock system
- Bottom gland plate for cable incoming




Specification

Material	Body & Plate	Stainless Steel sheet 1 mm. (Model DA-S 01-14) Stainless Steel sheet 1.5 mm. (Model DA-S 15-20)
	Door	Stainless Steel sheet 1.5 mm.
	Key Lock	DENCO 59-Lock-08
Surface Finish		Brushed

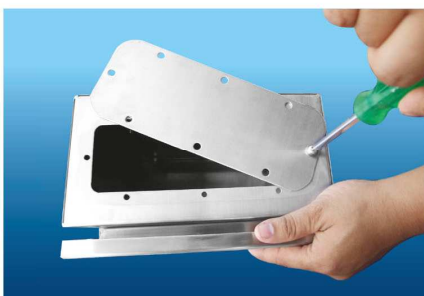

DA-S Model Structure

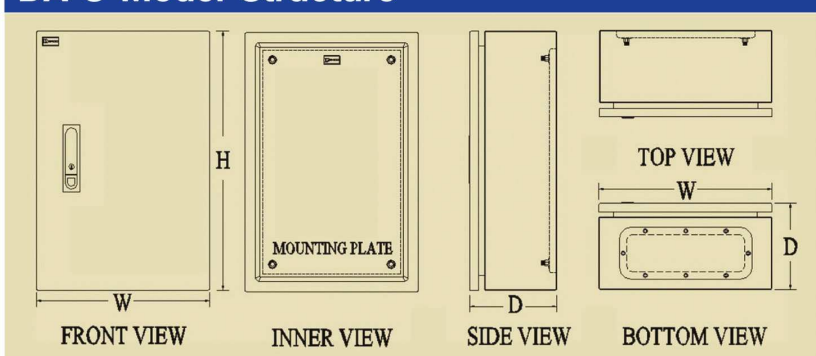

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)	MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DA-S-01	280	350	150	5,000	DA-S-11	500	600	250	12,000
DA-S-02	300	450	150	5,700	DA-S-12	550	700	250	12,800
DA-S-03	350	450	150	6,500	DA-S-13	630	750	250	13,500
DA-S-04	300	450	200	7,000	DA-S-14	630	900	250	14,300
DA-S-05	350	450	200	7,800	DA-S-15	600	1100	250	16,800
DA-S-06	350	500	200	8,500	DA-S-16	700	1100	250	18,200
DA-S-07	400	500	200	9,200	DA-S-17	800	1200	250	19,800
DA-S-08	450	600	200	10,000	DA-S-18	900	1200	250	21,200
DA-S-09	450	600	250	10,800	DA-S-19	800	1200	300	22,500
DA-S-10	500	600	200	11,400	DA-S-20	900	1200	300	24,500

Compact Enclosures Model DS-S



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Food-Beverage processing equipment
Controlling waste water treatment system
Lighting systems for Billboard or Cut-Out

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Single door type

Specification

Material	Enclosure	Stainless Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Brushed

DS-S Model Structure

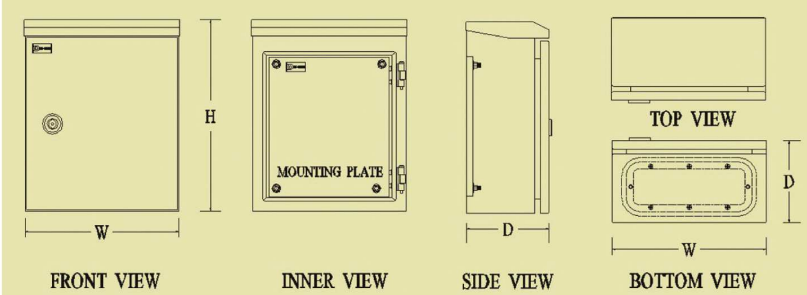

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-S-01	280	350	150	6,000
DS-S-02	300	450	150	7,200
DS-S-03	350	450	150	7,800
DS-S-04	300	450	200	8,500
DS-S-05	350	450	200	9,200
DS-S-06	350	500	200	10,000
DS-S-07	400	500	200	10,700
DS-S-08	450	600	200	11,500
DS-S-09	450	600	250	12,000
DS-S-10	500	600	200	12,900

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DS-S-11	500	600	250	13,500
DS-S-12	550	700	250	14,200
DS-S-13	630	750	250	15,000
DS-S-14	630	900	250	15,800
DS-S-15	600	1100	250	17,000
DS-S-16	700	1100	250	18,500
DS-S-17	800	1200	250	20,000
DS-S-18	900	1200	250	21,500
DS-S-19	800	1200	300	23,000
DS-S-20	900	1200	300	25,000

Compact Enclosures Model DSS-S



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Food-Beverage processing equipment
Controlling waste water treatment system
Outdoor sport stadium

Protection Category

IP 45


Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Double door type




Specification

Material	Enclosure	Stainless Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Brushed

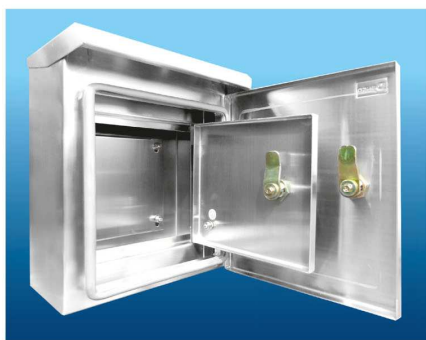

DSS-S Model Structure

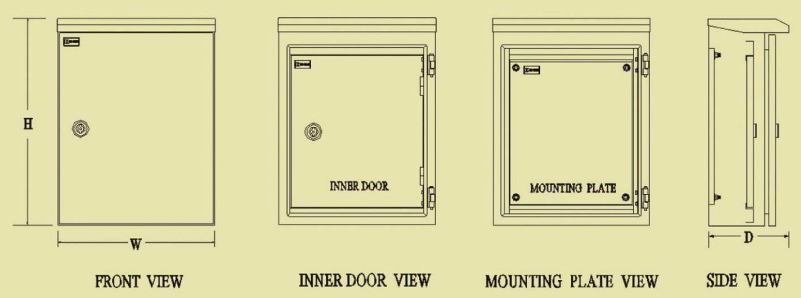

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)	MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSS-S-01	280	350	150	6,800	DSS-S-11	500	600	250	15,000
DSS-S-02	300	450	150	7,800	DSS-S-12	550	700	250	15,800
DSS-S-03	350	450	150	8,500	DSS-S-13	630	750	250	16,500
DSS-S-04	300	450	200	9,200	DSS-S-14	630	900	250	17,000
DSS-S-05	350	450	200	10,000	DSS-S-15	600	1100	250	18,500
DSS-S-06	350	500	200	10,700	DSS-S-16	700	1100	250	20,000
DSS-S-07	400	500	200	11,500	DSS-S-17	800	1200	250	21,500
DSS-S-08	450	600	200	12,900	DSS-S-18	900	1200	250	23,000
DSS-S-09	450	600	250	13,500	DSS-S-19	800	1200	300	24,500
DSS-S-10	500	600	200	14,200	DSS-S-20	900	1200	300	26,000

Compact Enclosures Model DSG-S



Features

Protection against water spray by special rain canopy.
These features provided optimum protection for the installed equipments inside enclosures.
Suitable for outdoor installation.

Major Applications

Water spray environments
Food-Beverage processing equipment
Controlling waste water treatment system
Outdoor sport stadium

Technical Data

-Rubber seal around rain gutter
-Internal mounting plate 1.5 mm.
-Fixing earth stud included
-Rain canopy against water and UV radiation
-Bottom gland plate for cable incoming
-Double door type, Viewing window

Protection Category


IP 45



Specification

Material	Enclosure	Stainless Steel sheet 1.5 mm. All Enclosure
	Key Lock	DENCO 59-Lock-02
Surface Finish		Brushed

DSG-S Model Structure

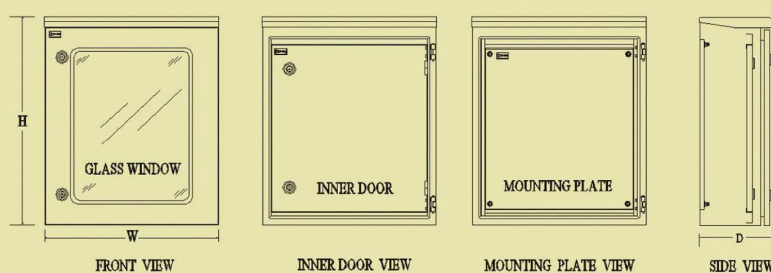

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)	MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DSG-S-01	280	350	150	7,200	DSG-S-11	500	600	250	15,800
DSG-S-02	300	450	150	8,500	DSG-S-12	550	700	250	16,500
DSG-S-03	350	450	150	9,200	DSG-S-13	630	750	250	17,000
DSG-S-04	300	450	200	10,000	DSG-S-14	630	900	250	18,000
DSG-S-05	350	450	200	10,700	DSG-S-15	600	1100	250	19,000
DSG-S-06	350	500	200	11,500	DSG-S-16	700	1100	250	20,500
DSG-S-07	400	500	200	12,000	DSG-S-17	800	1200	250	22,000
DSG-S-08	450	600	200	13,500	DSG-S-18	900	1200	250	23,500
DSG-S-09	450	600	250	14,200	DSG-S-19	800	1200	300	25,500
DSG-S-10	500	600	200	15,000	DSG-S-20	900	1200	300	27,500

Compact Enclosures Model DX


Steel Enclosure

Specification	
Material	Steel sheet 2 mm.
Surface Finish	Powder-coated in texture RAL 7032

Major Applications	
High humidity Environment Cleaning machine High level of sunshine and rainy Resistance to high-pressure cleaner	


Aluminium Enclosure

Specification	
Material	Aluminium Sheet 2 mm.
Surface Finish	Brushed

Major Applications	
Nearby seashore environments Food processing and liquid manufacturing Energy and environmental engineering Alkali and acid environments	



Electro Galvanized Enclosure

Specification	
Material	Electro Galvanized Sheet 2 mm.
Surface Finish	Powder-coated in texture RAL 7032

Major Applications	
Humidity Environment Outdoor Sitting High level of sunshine and rainy Resistance to pressure cleaner	

Supply Included
- Mounting plate - Removable bottom gland plate (screw lock) - Pocket strip for wiring plan or manual - Handle lock system - Earth stud included

Protection Category
HIGHEST PROTECTION "IP 65"

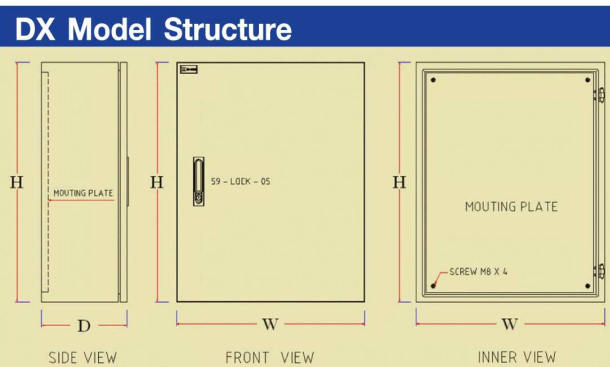

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DX-01	280	350	150	2,700
DX-02	300	450	150	3,000
DX-03	350	450	150	3,200
DX-04	300	450	200	3,500
DX-05	350	450	200	3,800
DX-06	350	500	200	4,200
DX-07	400	500	200	4,500
DX-08	450	600	200	4,800
DX-09	450	600	250	5,100
DX-10	500	600	200	5,400

MODEL	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DX-11	500	600	250	5,700
DX-12	550	700	250	6,000
DX-13	630	750	250	6,300
DX-14	630	900	250	6,700
DX-15	600	1100	250	7,200
DX-16	700	1100	250	7,500
DX-17	800	1200	250	7,800
DX-18	900	1200	250	8,200
DX-19	800	1200	300	8,500
DX-20	900	1200	300	8,800

Remark : This Price for Steel Enclosure, Aluminium and Electro Galvanized Enclosure available on your request.




Features

Desk console enclosure was designed for controlling machines with easy operation. Top panel was designed in tilting style. "DENCO" Desk console enclosure also use widely in controlling CNC machines and Telecommunication, Especially in LAB, control room and security system. Standard equipment such as door stay are included for convenience installation equipment.

Specification

Material	Steel sheet 1.5 mm.
Surface Finish	Pre-treatment by zinc phosphate process Powder-Coated in texture RAL 7032

DC Model Structure

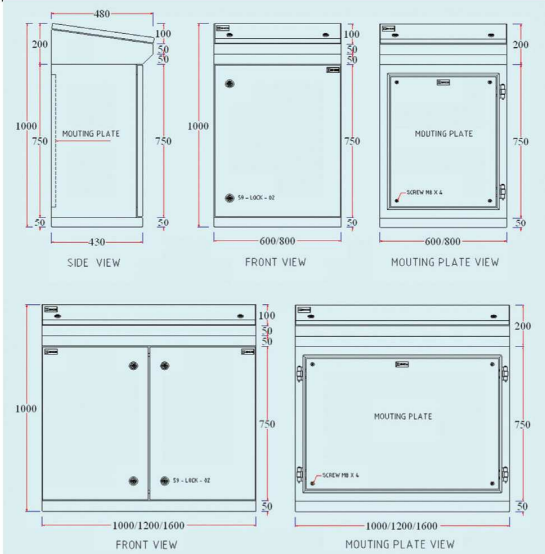

Protection Category

IP 40

Supply Includes

- Gasket seal around rain gutter lip and bottom desk.
- Internal mounting plate 1.5 mm.
- Fixing earth stud included.
- 2 positions locking system at the front door also at the tile console.
- 50 mm. base height (Steel Sheet 2.0 mm.).
- Door stay for retain and secure the operating and service conditions, without the enclosure door closed.
- Locking system DENCO 59-Lock-02

Model	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DC-600	600	1000	430	7,500
DC-800	800	1000	430	8,500
DC-1000	1000	1000	430	10,000
DC-1200	1200	1000	430	12,000
DC-1600	1600	1000	430	20,000

Computer Panel Model DP



Features

"DENCO" Computer Panel is designed for keeping computer and other equipments, such as Monitor, Keyboard and Printer which were used for controlling machines that processing by computerized system and using software application.

This panel was divided into 3 parts.

1. Checking system through monitor.
2. Keyboard drawer which can move in and out.
3. Keeping section at the bottom for printer or related manual for machine, etc.

Specification

Material	Steel sheet 1.5 mm. Structure 3 mm.
Surface Finish	Powder-Coated in texture RAL 7032


Supply Includes

- Viewing window for monitor (Glass).
- CPU / Window shelf.
- 2 break castor and 2 without break castors was installed at the base for saving movement.
- Slide tray for keyboard, which can move in-out.
- Mounting support for light at the roof inside panel.
- Locking system DENCO 59-Lock-02

Protection Category

IP 40

DC Model Structure

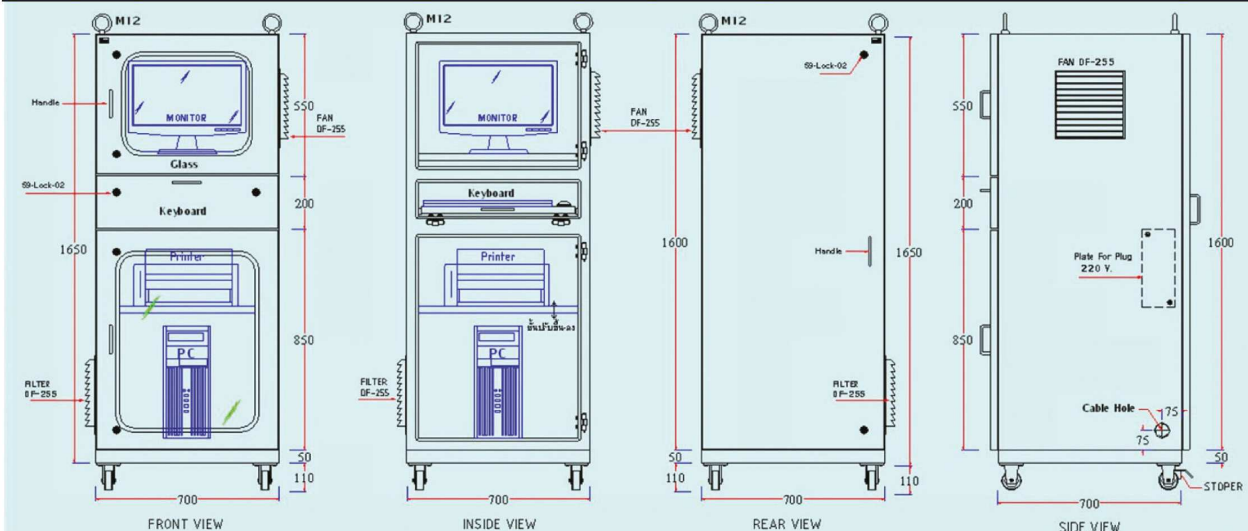

Model	Width(mm.)	Height(mm.)	Depth(mm.)	Price/Unit(Bath)
DP-01	700	1650	700	28,000



Features

"DM" was designed to facilitate customers by enabling a capability to simply expand or modify the system in a shortest time with independent structure design.

"DENCO" provided a wide range products and systems together with flexibility inquired by customers such as busbar and wiring systems (Motor control system, Capacitors bank and PLC).

Supply Includes

- Mounting Plate 1.5 mm.
- Bracket support provide at the top for movement.
- Cable gland plate at the top and bottom.
- Ventilation screen.
- Locking system DENCO 59-Lock-02

Protection Category

IP 40


Specification

Material	Steel sheet 1.5 mm. Structure 3 mm.
Surface Finish	Powder-Coated in texture RAL 7032

Remark :


- Locking system can change on request.
- Other sizes, Cut-outs and drilled holes available on request.

MAIN DISTRIBUTION BOARD (SINGLE SECTION)

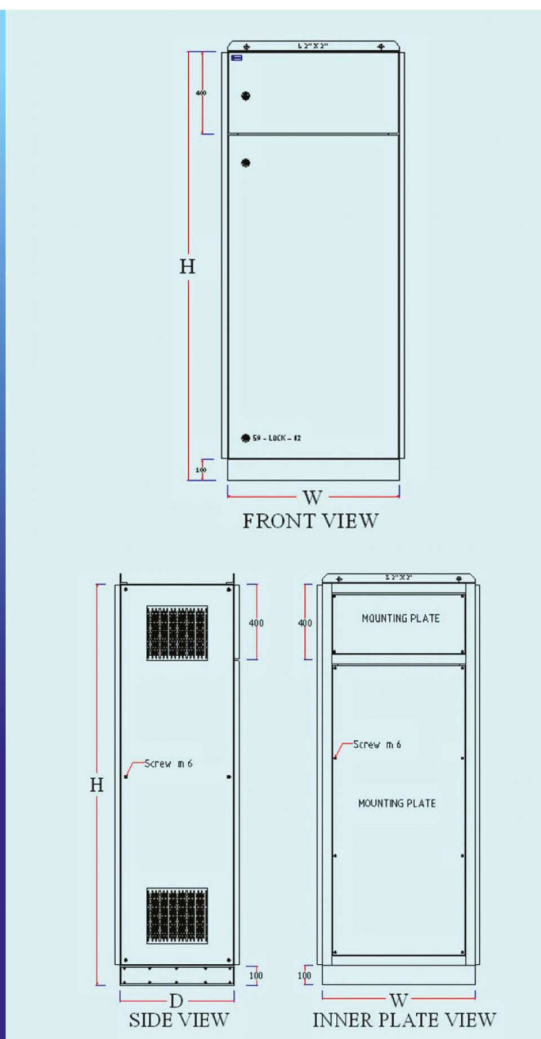


Model	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DM-01	600	1800	400	17,000
DM-02	600	1800	600	18,000
DM-03	800	1800	600	19,000
DM-04	800	2100	600	20,500
DM-05	800	2100	800	21,500
DM-06	1000	2100	600	23,000
DM-07	1000	2100	800	24,000
DM-08	1000	2100	1000	25,500

MAIN DISTRIBUTION BOARD (TWO SECTIONS)

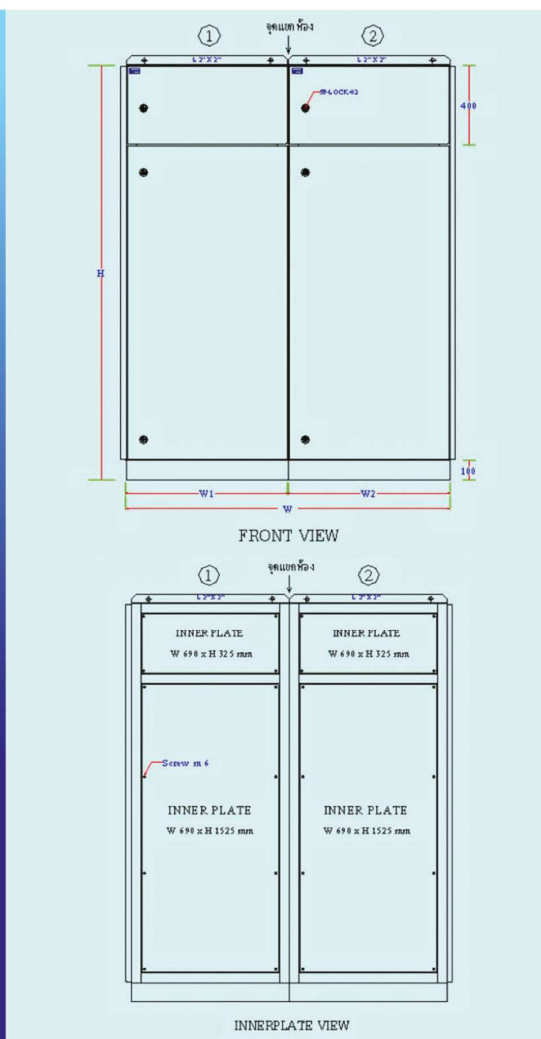

Model	Total Width (mm.)	Width 1 (mm.)	Width 2 (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DM-09	1200	600	600	1800	400	33,000
DM-10	1200	600	600	1800	600	35,000
DM-11	1600	800	800	1800	600	37,000
DM-12	1600	800	800	2100	600	40,000
DM-13	1600	800	800	2100	800	42,000
DM-14	2000	1000	1000	2100	600	45,000
DM-15	2000	1000	1000	2100	800	47,000
DM-16	2000	1000	1000	2100	1000	50,000

MAIN DISTRIBUTION BOARD (THREE SECTIONS)

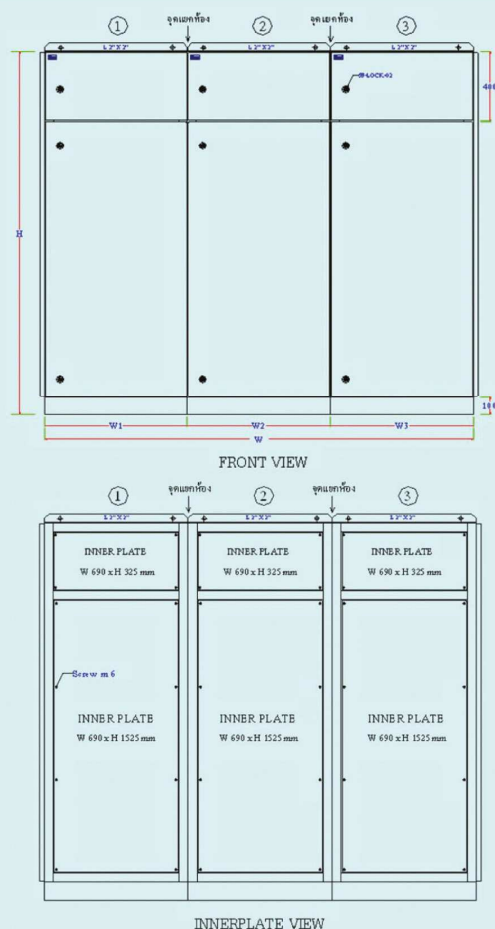

Model	Total Width (mm.)	Width 1 (mm.)	Width 2 (mm.)	Width 3 (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DM-17	1800	600	600	600	1800	400	49,000
DM-18	1800	600	600	600	1800	600	52,000
DM-19	2400	800	800	800	1800	600	55,000
DM-20	2400	800	800	800	2100	600	59,500
DM-21	2400	800	800	800	2100	800	62,500
DM-22	3000	1000	1000	1000	2100	600	67,000
DM-23	3000	1000	1000	1000	2100	800	70,000
DM-24	3000	1000	1000	1000	2100	1000	74,500

Working Area

Water spray environment

Telecommunication systems

Electricity and water supply sectors

Pump and motor control systems

Waste water treatment plant

Environment technology


Supply Includes

- Water-proof canopy.
- Viewing window (Glass) at the front door.
- Mounting plate.
- Removable bottom gland plate (screw lock).
- Pocket strip for wiring plan or manual.
- Handle lock (front door) / Twist lock (Inner door).
- Earth stud included.
- 100 mm. base height.


Note :

Material can change upon request, such as electro-galvanized or stainless steel.


DO Model Structure

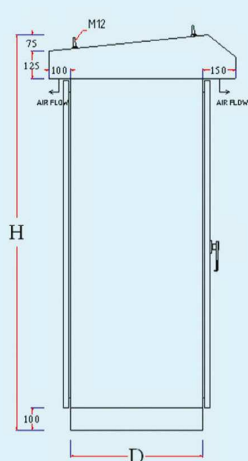


SIDE VIEW

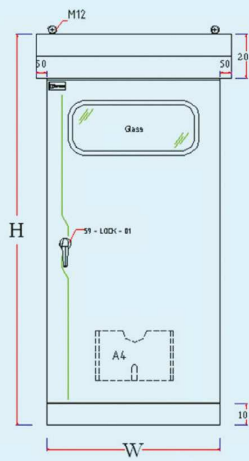


FRONT VIEW

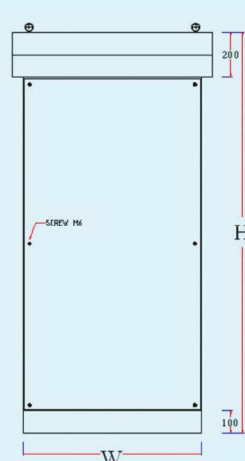


BACK VIEW

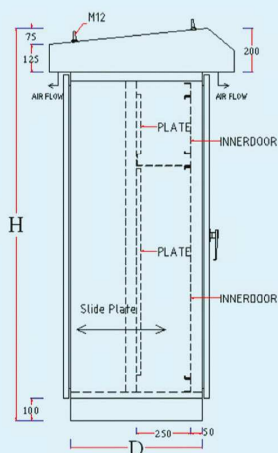

INSIDE VIEW

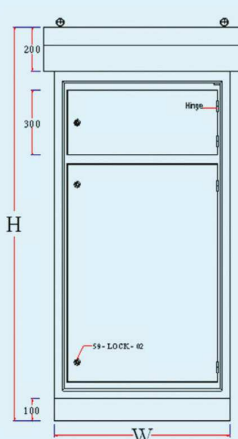

INNER DOOR VIEW

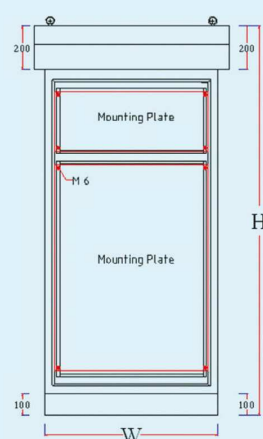

MOUNTING PLATE VIEW

Main Distribution Board Model DO



Features

"DO" was designed for special environments with high protection and simply remove or modify the structure.

"DENCO" provided a special designed for roof tilt to prevent accumulated liquids on the roof and reliable protection systems. The inner rubber seal is designed to protect water spray from every direction

Specification

Material

Steel sheet 1.5 mm.
Structure 3 mm.

Surface Finish

Powder-Coated in texture RAL 7032

Protection Category

IP 45

Model	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DO-01	600	1800	400	22,000
DO-02	600	1800	600	24,000
DO-03	600	1800	800	26,000
DO-04	800	1800	1000	29,000
DO-05	800	2300	400	28,000
DO-06	800	2300	600	30,000
DO-07	800	2300	800	32,000
DO-08	800	2300	1000	34,000

Remark : Locking system can change on request.

Other sizes, Cut-outs and drilled holes available on request.

Shelf Model D-CASE



"D-CASE" is suitable for warehouses or factories to keep any products and materials for production. It's underneath and strength, easy to install and adjust to each products size.

Specification

Material	Steel sheet 2.0 mm.
Surface Finish	Powder-Coated in texture RAL 7032

Supply Includes


- 2 pcs. main column.
- 8 pcs. main beam.
- 12 pcs. plywood support beam.
- 32 pcs. M8 cap screw.
- 4 pcs. ply wood board.

Technical data

250 Kgs. load/tray.
Main column welded.
Main abeam bolt & nut.

Model	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
D-CASE	1265	2200	600	9,500

Pull boxes Model DB

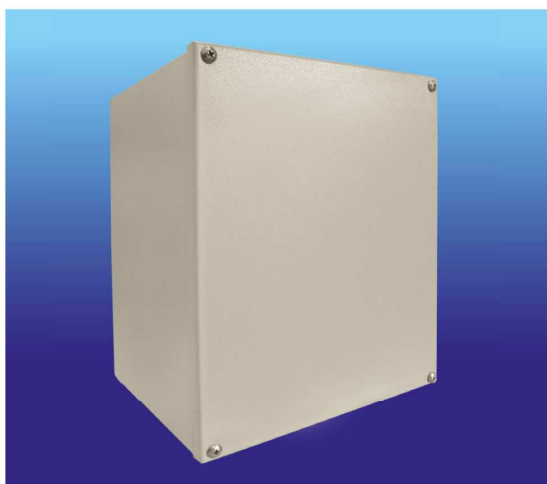

Features

"DB" Pull boxes are accessories for installing with wire way or junction boxes. Provide in 4 standard sizes.

Specification

Material	Steel sheet 1 mm.
Surface Finish	Powder-Coated in texture RAL 7032


Protection Category

IP 40

Supply Includes

- Mounting plate
- Nut ground

Model	Width (mm.)	Height (mm.)	Depth (mm.)	Price/Unit (Bath)
DB-01	100	150	100	250
DB-02	150	150	100	300
DB-03	200	150	150	400
DB-04	200	200	150	450

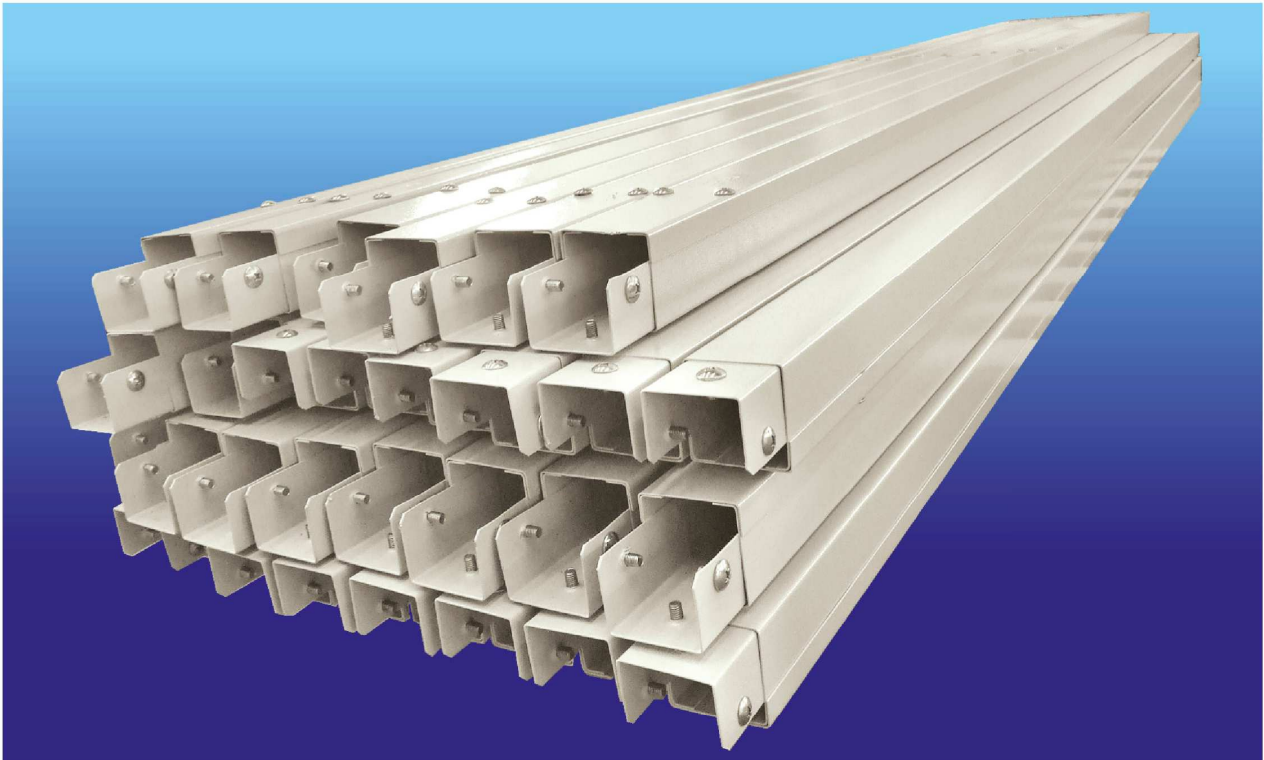

Cable Wire Way is a device to install many cables in U-shape tray orderly and safety from the power source to the object located at a certain spot. To meet the above requirements sufficiently, We have developed various type of cable tray, different in size and coating according to usage applications.

Technical Data

- Connector already included by welding with wire way.
- Suitable for indoor installation.
- Just open the cover by screwing.
- Suitable for cable and telephone installation system.

Specification

Material	Steel sheet 1.0 mm.
Surface Finish	Pre-treatment by zinc phosphate process Powder-Coated in texture RAL 7032

MODEL	Height (Inch)	Width (Inch)	Price/Unit (Bath)	
			Length 4 Feet (1.2 M.)	Length 8 Feet (2.4 M.)
DW 2X3	2	3	230	380
DW 2X4	2	4	250	450
DW 3X4	3	4	270	480
DW 4X4	4	4	290	510
DW 4X6	4	6	390	670
DW 6X6	6	6	420	720
DW 4X8	4	8	440	820
DW 6X8	6	8	560	900
DW 4X10	4	10	680	1,200
DW 6X10	6	10	750	1,400
DW 6X12	6	12	860	1,550
DW 8X12	8	12	950	1,700



ข้องเปิดด้านบน	
DEU : 90° Elbow Top Opening	
Model	Price/Unit
DEU 2X3	230
DEU 2X4	240
DEU 3X4	250
DEU 4X4	270
DEU 4X6	300
DEU 6X6	320
DEU 4X8	360
DEU 6X8	450
DEU 4X10	500
DEU 6X10	600
DEU 6X12	700
DEU 8X12	800




ข้องเปิดด้านใน	
DEI : 90° Elbow Inside Opening	
Model	Price/Unit
DEI 2X3	230
DEI 2X4	240
DEI 3X4	250
DEI 4X4	270
DEI 4X6	300
DEI 6X6	320
DEI 4X8	360
DEI 6X8	450
DEI 4X10	500
DEI 6X10	600
DEI 6X12	700
DEI 8X12	800




ข้องเปิดด้านนอก	
DEO : 90° Elbow Outside Opening	
Model	Price/Unit
DEO 2X3	230
DEO 2X4	240
DEO 3X4	250
DEO 4X4	270
DEO 4X6	300
DEO 6X6	320
DEO 4X8	360
DEO 6X8	450
DEO 4X10	500
DEO 6X10	600
DEO 6X12	700
DEO 8X12	800



ข้อต่อสามทางเปิดด้านบน	
DET : 3 Ways Top Open Type	
Model	Price/Unit
DET 2X3	290
DET 2X4	320
DET 3X4	350
DET 4X4	370
DET 4X6	390
DET 6X6	420
DET 4X8	450
DET 6X8	550
DET 4X10	600
DET 6X10	650
DET 6X12	750
DET 8X12	900

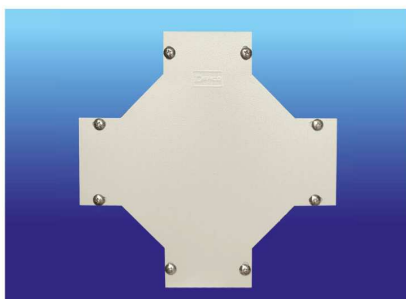

ข้อต่อสี่ทางเปิดด้านบน	
DEX : Horizontal Crosses Type	
Model	Price/Unit
DEX 2X3	350
DEX 2X4	370
DEX 3X4	420
DEX 4X4	450
DEX 4X6	470
DEX 6X6	550
DEX 4X8	600
DEX 6X8	700
DEX 4X10	750
DEX 6X10	860
DEX 6X12	900
DEX 8X12	1,100

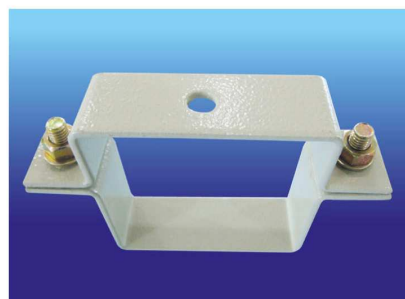

แฉงเกอร์ วยเวย์	
DH : Hanger for Wire Way	
Model	Price/Unit
DH 2X3	105
DH 2X4	120
DH 3X4	135
DH 4X4	150
DH 4X6	180
DH 6X6	195
DH 4X8	195
DH 6X8	225
DH 4X10	225
DH 6X10	255
DH 6X12	285
DH 8X12	300



Cable ladder is a device to install a lot of cable in U-shape tray orderly and safety from the power source to the object located at a certain spot. To meet the above requirements sufficiently, We have developed various type of cable ladder, different in size and coating according to usage applications.

Technical Data

- High Durable.
- Suitable for outdoor installation.
- Suitable for normal and high voltage cable installation.

Specification

Material	Steel sheet 2.0 mm.
Surface Finish	Hot - Dip Galvanized or Powder-Coated in texture RAL 7032

Model	Width (mm.)	Length (M.)	Thickness (mm.)	Price/M. (Bath)
DQR-200	200	3	2	400
DQR-300	300	3	2	475
DQR-400	400	3	2	550
DQR-500	500	3	2	650
DQR-600	600	3	2	725
DQR-700	700	3	2	800
DQR-800	800	3	2	850
DQR-900	900	3	2	950
DQR-1000	1000	3	2	1,000

*Remark : Cover can order as optional

ข้ออเนวตั้งด้านนอก - DQRO
Outside Vertical Risers




Model	Width (mm.)	Price/Unit (Bath)
DQRO-200	200	500
DQRO-300	300	575
DQRO-400	400	675
DQRO-500	500	750
DQRO-600	600	800
DQRO-700	700	875
DQRO-800	800	950
DQRO-900	900	1,050
DQRO-1000	1000	1,150

ข้ออเนวตั้งด้านใน - DQRI
Inside Vertical Risers



Model	Width (mm.)	Price/Unit (Bath)
DQRI-200	200	500
DQRI-300	300	575
DQRI-400	400	675
DQRI-500	500	750
DQRI-600	600	800
DQRI-700	700	875
DQRI-800	800	950
DQRI-900	900	1,050
DQRI-1000	1000	1,150

แผ่นปิดท้ายเคเบิลแลดเดอร์ DQRC
End Plate

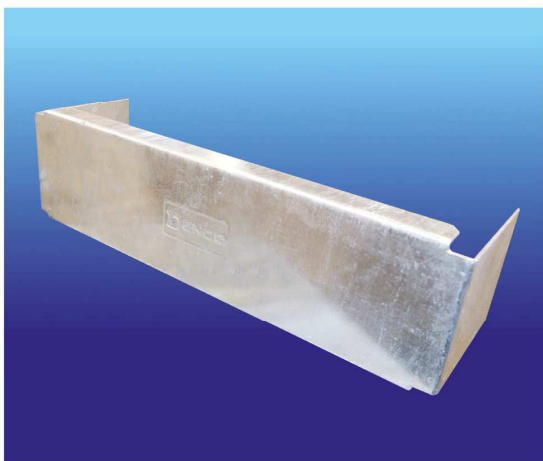


Model	Width (mm.)	Price/Unit (Bath)
DQRC-200	200	140
DQRC-300	300	180
DQRC-400	400	220
DQRC-500	500	280
DQRC-600	600	325
DQRC-700	700	380
DQRC-800	800	420
DQRC-900	900	500
DQRC-1000	1000	600

ข้อฉาก - DQRL
Horizontal 90° Elbows



Model	Width (mm.)	Price/Unit (Bath)
DQRL-200	200	400
DQRL-300	300	475
DQRL-400	400	550
DQRL-500	500	650
DQRL-600	600	725
DQRL-700	700	800
DQRL-800	800	850
DQRL-900	900	950
DQRL-1000	1000	1,000

ข้อต่อสามทาง - DQRT
Horizontal Tees

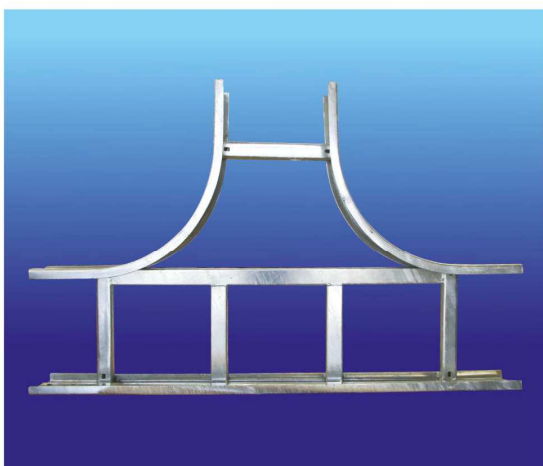


Model	Width (mm.)	Price/Unit (Bath)
DQRT-200	200	600
DQRT-300	300	725
DQRT-400	400	825
DQRT-500	500	950
DQRT-600	600	1,075
DQRT-700	700	1,225
DQRT-800	800	1,350
DQRT-900	900	1,450
DQRT-1000	1000	1,550

ข้อต่อสี่ทาง - DQRX
Horizontal Crosses



Model	Width (mm.)	Price/Unit (Bath)
DQRX-200	200	800
DQRX-300	300	950
DQRX-400	400	1,100
DQRX-500	500	1,150
DQRX-600	600	1,250
DQRX-700	700	1,350
DQRX-800	800	1,500
DQRX-900	900	1,600
DQRX-1000	1000	1,800

แป้นรองรับเคเบิลแลดเดอร์ - DQRB
Brackets Support

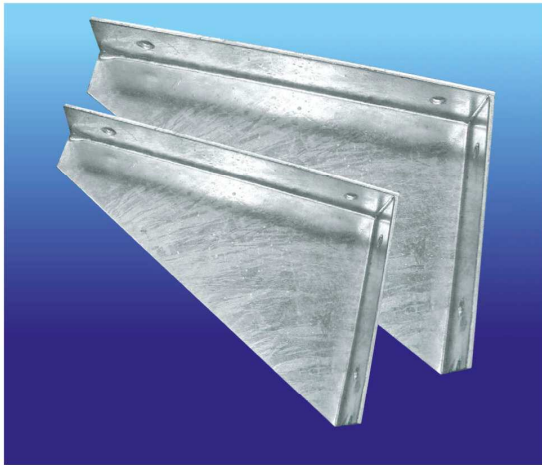


Model	Width (mm.)	Price/Unit (Bath)
DQRB-200	200	200
DQRB-300	300	300
DQRB-400	400	400
DQRB-500	500	500
DQRB-600	600	600
DQRB-700	700	750
DQRB-800	800	900
DQRB-900	900	1,100
DQRB-1000	1000	1,300

แฮงเกอร์เคเบิลแลดเดอร์ - DQRH
Hanger



Model	Width (mm.)	Price/Unit (Bath)
DQRH-200	200	140
DQRH-300	300	180
DQRH-400	400	220
DQRH-500	500	280
DQRH-600	600	325
DQRH-700	700	380
DQRH-800	800	420
DQRH-900	900	500
DQRH-1000	1000	600

ข้อต่อตรง - DQRG



ราคา-Price 70.-

ข้อต่อลงตู้ - DQRU



ราคา-Price 75.-

ข้อต่อโยกคอม้า - DQRE




ราคา-Price 280.-

ข้อต่อโยกขึ้นลง - DQRF




ราคา-Price 250.-

ประกบยึดข้าง - DQRK



ราคา-Price 150.-

แผ่นกั้นกลาง - DQRD



ราคา-Price 150.-/M

ข้อต่อลดด้านกว้าง - DQRR



ราคา-Price 120.-

แคลมป์แลดเดอร์ - DQRS



ราคา-Price 40.-

ข้อต่อปรับซ้ายขวา - DQR-L



ราคา-Price 250.-

เจ็ลล็อกแลดเดอร์ - DQR-J



ราคา-Price 85.-



Cable Tray is a device to install a lot of cable in U-shape tray orderly and safety from the power source to the object located at a certain spot. To meet the above requirements sufficiently, We have developed various type of cable tray, different in size and coating according to usage applications.

Technical Data

- Especially for heavy duty work.
- Suitable for both indoor and outdoor installation.
- Suitable for normal and high voltage cable installation.


Specification

Material	Steel sheet 1.5 mmt.
Surface Finish	Hot - Dip Galvanized or Powder-Coated in texture RAL 7032

Model	Width (mm.)	Length (M.)	Thickness (mm.)	Price/M. (Bath)
DSR-200	200	2.4	1.5	300
DSR-300	300	2.4	1.5	400
DSR-400	400	2.4	1.5	500
DSR-500	500	2.4	1.5	600
DSR-600	600	2.4	1.5	700
DSR-700	700	2.4	1.5	970
DSR-800	800	2.4	1.5	1,070
DSR-900	900	2.4	1.5	1,170
DSR-1000	1000	2.4	1.5	1,320

*Remark : Cover can order as optional.

**ช่องอเนวตั้งด้านนอก - DSRO
Outside Vertical Risers**

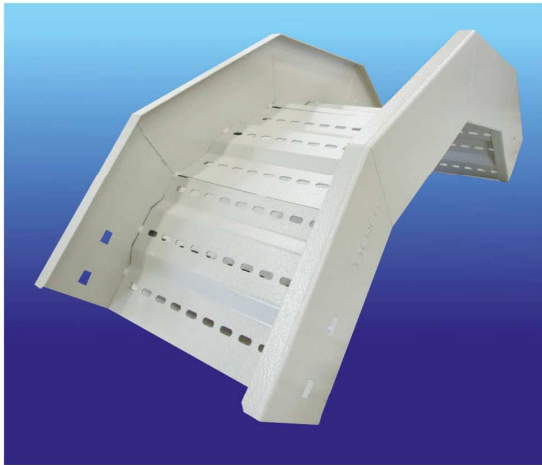


Model	Width (mm.)	Price/Unit (Bath)
DSRO-200	200	370
DSRO-300	300	440
DSRO-400	400	500
DSRO-500	500	570
DSRO-600	600	630
DSRO-700	700	690
DSRO-800	800	750
DSRO-900	900	820
DSRO-1000	1000	870

**ช่องอเนวตั้งด้านใน - DSRI
Inside Vertical Risers**




Model	Width (mm.)	Price/Unit (Bath)
DSRI-200	200	370
DSRI-300	300	440
DSRI-400	400	500
DSRI-500	500	570
DSRI-600	600	630
DSRI-700	700	690
DSRI-800	800	750
DSRI-900	900	820
DSRI-1000	1000	870

**แผ่นปิดท้ายเคเบิลเทรย์ DSRC
End Plate**

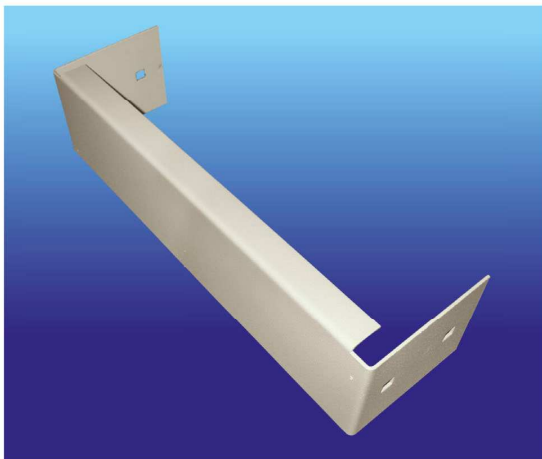


Model	Width (mm.)	Price/Unit (Bath)
DSRC-200	200	110
DSRC-300	300	130
DSRC-400	400	150
DSRC-500	500	170
DSRC-600	600	190
DSRC-700	700	210
DSRC-800	800	230
DSRC-900	900	250
DSRC-1000	1000	270

**ข้อฉาก - DSRL
Horizontal 90° Elbows**

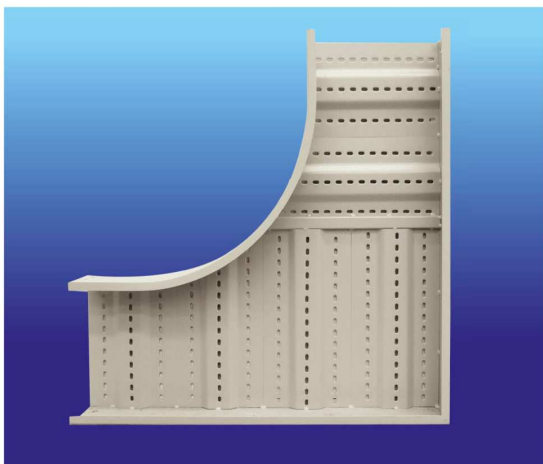


Model	Width (mm.)	Price/Unit (Bath)
DSRL-200	200	440
DSRL-300	300	570
DSRL-400	400	690
DSRL-500	500	810
DSRL-600	600	940
DSRL-700	700	1,070
DSRL-800	800	1,190
DSRL-900	900	1,320
DSRL-1000	1000	1,440

**ข้อต่อสามทาง - DSRT
Horizontal Tees**

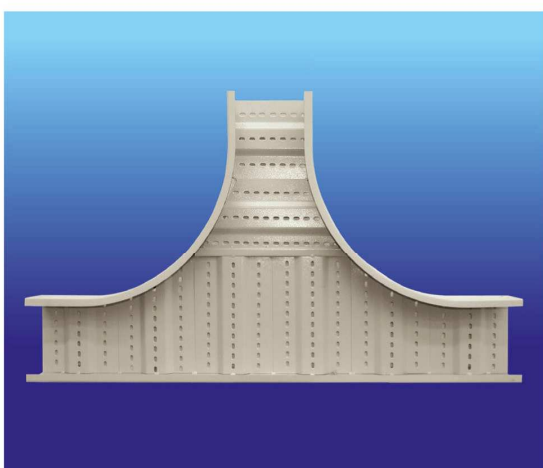


Model	Width (mm.)	Price/Unit (Bath)
DSRT-200	200	570
DSRT-300	300	690
DSRT-400	400	810
DSRT-500	500	940
DSRT-600	600	1,070
DSRT-700	700	1,190
DSRT-800	800	1,320
DSRT-900	900	1,440
DSRT-1000	1000	1,570

**ข้อต่อสี่ทาง - DSRX
Horizontal Crosses**

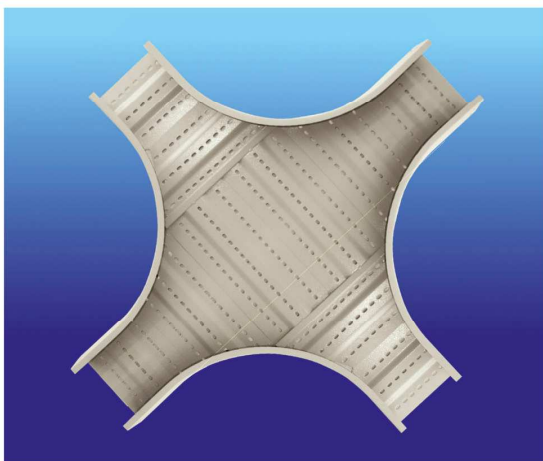


Model	Width (mm.)	Price/Unit (Bath)
DSRX-200	200	690
DSRX-300	300	820
DSRX-400	400	940
DSRX-500	500	1,070
DSRX-600	600	1,190
DSRX-700	700	1,320
DSRX-800	800	1,440
DSRX-900	900	1,570
DSRX-1000	1000	1,690

แป้นรองรับเคเบิลเทรย์ - DSRB
Brackets Support

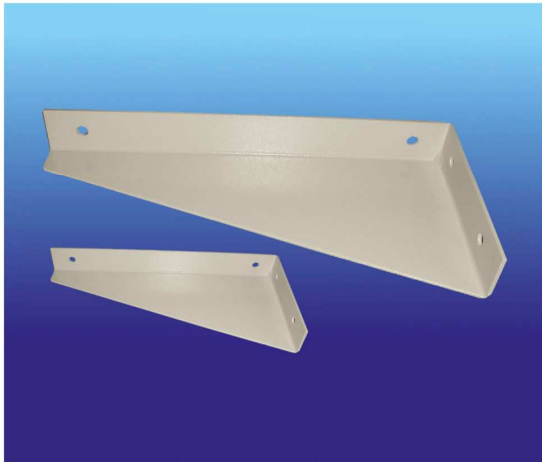

Model	Width (mm.)	Price/Unit (Bath)
DSRB-200	200	200
DSRB-300	300	300
DSRB-400	400	400
DSRB-500	500	500
DSRB-600	600	600
DSRB-700	700	750
DSRB-800	800	900
DSRB-900	900	1,100
DSRB-1000	1000	1,300

แสลงเกอร์เคเบิลเทรย์ - DSRH
Hanger

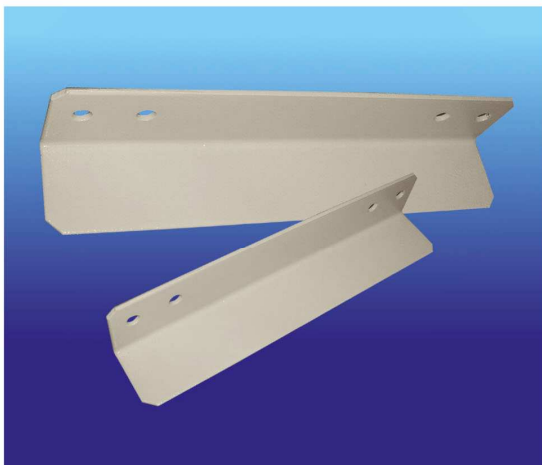


Model	Width (mm.)	Price/Unit (Bath)
DSRH-200	200	140
DSRH-300	300	180
DSRH-400	400	220
DSRH-500	500	280
DSRH-600	600	325
DSRH-700	700	380
DSRH-800	800	420
DSRH-900	900	500
DSRH-1000	1000	600

ข้อต่อตรง - DSRG



ราคา-Price 70.-

ข้อต่อโยกขึ้นลง - DSRF



ราคา-Price 250.-

ข้อต่อโยกคอม้า - DSRE



ราคา-Price 280.-

ข้อต่อลงตู้ - DSRU




ราคา-Price 75.-

ประกบยึดข้าง - DSRK




ราคา-Price 50.-

แคลมป์เทรย์ - DSRS



ราคา-Price 40.-

ข้อต่อลดด้านกว้าง - DSRR



ราคา-Price 120.-

ข้อต่อปรับซ้ายขวา - DSR-L



ราคา-Price 250.-



กุญแจกด DA
PUSH LOCK
รุ่น 59-LOCK 01
ราคาตัวละ 80 .-



กุญแจกดตัว DA-S
SILVER LOCK
รุ่น 56-LOCK 08
ราคาตัวละ 350.-



กุญแจกลม
TWIST LOCK
รุ่น 59-LOCK 02
ราคาตัวละ 110 .-



กุญแจสมอเรือ
TURN LOCK
รุ่น 59-LOCK 09
ราคาตัวละ 80.-



กุญแจเขาควย
SWING HANDEL LOCK
รุ่น 59-LOCK 03
ราคาตัวละ 180 .-



กุญแจหูกกระเป๋าเล็ก
GRIP LOCK
รุ่น 59-LOCK 10
ราคาตัวละ 80.-




กุญแจเขาควยกันน้ำ
SWING HANDEL LOCK
รุ่น 59-LOCK 04
ราคาตัวละ 300 .-



กุญแจหูกกระเป๋าใหญ่
GRIP LOCK
รุ่น 59-LOCK 11
ราคาตัวละ 180.-



กุญแจคอนโทรล
SWING HANDEL LOCK
รุ่น 59-LOCK 05
ราคาตัวละ 900 .-



กุญแจหูกกระเป๋าติดสปริง
GRIP LOCK
รุ่น 59-LOCK 12
ราคาตัวละ 300.-



กุญแจคอนโทรลสีเงิน
SWING HANDEL LOCK
รุ่น 59-LOCK 06
ราคาตัวละ 900.-



ดอกกุญแจสั้น
TWIST KEY
รุ่น 59-LOCK 21
ราคาตัวละ 30.-



กุญแจคอนโทรลเล็ก
SWING HANDEL LOCK
รุ่น 59-LOCK 07
ราคาตัวละ 200.-




ดอกกุญแจยาว
TWIST KEY
รุ่น 59-LOCK 22
ราคาตัวละ 50.-



ยางขอบตู้ DA/DS
Rubber Seal For DA/DS
ราคาเมตรละ 40 .-




ยางกระจก DSG 01-13
For Viewing Window
of DSG 01-13
ราคาเมตรละ 30.-




ยางขอบฝา DM
Rubber Seal For DM
ราคาเมตรละ 20 .-



ยางกระจก DSG 14-20
For Viewing Window
of DSG 14-20
ราคาเมตรละ 40.-




ยางขอบตู้ DO/LP
Rubber Seal For
DO/LP
ราคาเมตรละ 80 .-



ยางฟองน้ำ 3 มม.
Rubber Sponge 3 mm.
ราคาเมตรละ 40.-



ชุดสกรูสำหรับ
ข้อต่อแลคเคอร์
ชุดละ 8.-




ยางฟองน้ำ 6 มม.
Rubber Sponge 6 mm.
ราคาเมตรละ 50.-



ชุดหลอดไฟ สำหรับติดในตู้คอนโทรล
ราคาชุดละ 800.-



สีสเปรย์
สีครีม DENCO # 7032
สีเทาอ่อน DENCO # 7035
สีเทา DENCO # 7040
ราคากระป๋องละ 180.-

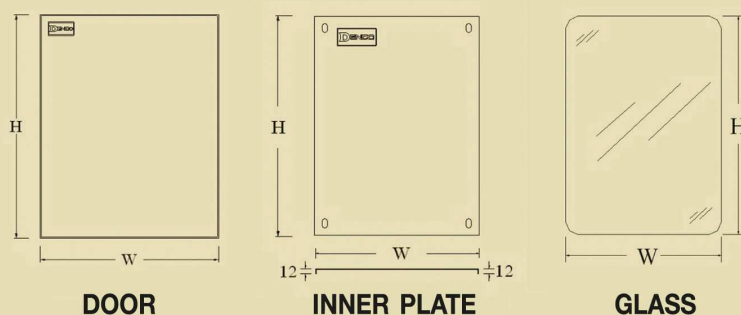

PRICE/UNIT (Bath)

MODEL	DOOR DA/DS	INNER PLATE DA	INNER PLATE DS	INNER PLATE DSG	GLASS
01	280	250	260	250	180
02 & 04	310	280	290	280	200
03 & 05	350	300	320	300	240
06	380	350	360	350	280
07	420	380	400	380	320
08 & 09	450	420	430	420	360
10 & 11	500	450	470	450	380
12	600	500	550	500	420
13	650	600	620	600	460
14	700	650	680	650	500
15	800	750	780	750	600
16	900	800	850	800	700
17 & 19	1,100	1,000	1,050	1,000	800
18 & 20	1,200	1,100	1,150	1,100	900

DIMENSION : W x H (mm.)

MODEL	DOOR DA	DOOR DS	INNER PLATE DA	INNER PLATE DS	INNER PLATE DSG	GLASS
01	280x350	280x320	220x290	220x255	205x210	140x210
02 & 04	300x450	300x420	240x390	240x355	225x310	160x310
03 & 05	350x450	350x420	290x390	290x355	275x310	210x310
06	350x500	350x470	290x440	290x405	275x360	210x360
07	400x500	400x470	340x440	340x405	325x360	260x360
08 & 09	450x600	450x570	390x540	390x505	375x460	310x460
10 & 11	500x600	500x570	440x540	440x505	425x460	360x460
12	550x700	550x670	490x640	490x605	475x560	410x560
13	630x750	630x720	570x690	570x655	555x610	490x610
14	630x900	630x870	570x840	570x805	555x760	400x650
15	600x1100	600x1070	540x1040	540x1005	525x960	400x850
16	700x1100	700x1070	640x1040	640x1005	625x960	400x850
17 & 19	800x1200	800x1170	740x1140	740x1105	725x1060	500x950
18 & 20	900x1200	900x1170	840x1140	840x1105	825x1060	600x950

Fan Ventilation Model DF

Features

"DF" ventilation fans are suitable for installation in every enclosure types. They have been designed to cool and ventilate the electrical equipment inside enclosures. They are quickly and simply to replace and clean for maintenance.

Specification

Made of heat resistance ABS (VO) Plastic
Self extinguishable
Air filter mat can be replaced and clean
Electrical connection by terminals
Color RAL 7032




FAN VENTILATION "DF-130"

Air Volume	25 CFM.
Noise Level	47-53 dB (A)
Fan Voltage	220V.AC 50Hz.
Power/Current	16 Watt/0.14 Amp.
Front Dimension	130x130 mm.
Price/Unit	1,080.-



FAN VENTILATION "DF-255"

Air Volume	120 CFM.
Noise Level	58 dB (A)
Fan Voltage	220V.AC 50Hz.
Power/Current	4.0 Watt/0.3 Amp.
Front Dimension	255x255 mm.
Price/Unit	1,980.-

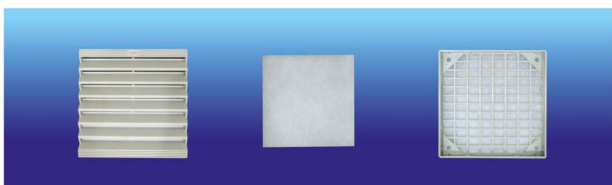

FILTER SET "DF-130"

Front Dimension	130x130 mm.
Price/Unit	400.-



FILTER SET "DF-255"

Front Dimension	255x255 mm.
Price/Unit	800.-